



# High-order absorbing boundary conditions with edge and corner compatibility for the Helmholtz equation

Axel Modave, Vanessa Mattesi, Christophe Geuzaine

## ► To cite this version:

Axel Modave, Vanessa Mattesi, Christophe Geuzaine. High-order absorbing boundary conditions with edge and corner compatibility for the Helmholtz equation. ACOMEN 2017 - 7th International Conference on Advanced Computational Methods in Engineering, Sep 2017, Ghent, Belgium. hal-01588749

**HAL Id: hal-01588749**

**<https://hal.science/hal-01588749>**

Submitted on 16 Sep 2017

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

## High-order absorbing boundary conditions with edge and corner compatibility for the Helmholtz equation

Axel Modave<sup>1</sup>, Vanessa Mattesi<sup>2</sup> and Christophe Geuzaine<sup>2</sup>

<sup>1</sup> Team POEMS, CNRS-ENSTA-INRIA, Université Paris-Saclay, France

<sup>2</sup> Electrical Engineering and Computer Science, University of Liège

e-mails: axel.modave@ensta-paristech.fr, vanessa.mattesi@ulg.ac.be,  
cgeuzaine@ulg.ac.be

### Abstract

We deal with the finite element solution of 3D time-harmonic acoustic wave problems defined on unbounded domains, but computed using cuboidal computational domains with artificial boundaries. We combine a standard finite element method for the Helmholtz equation with high-order absorbing boundary conditions (*on the faces of the domain*) and compatibility relations (*on the edges and the corners*) that provide an arbitrary high accuracy.

*Key words:* Helmholtz equation, Finite element method, Radiation boundary condition, Corner compatibility

*MSC 2010:* 35J05, 35J25

The finite element methods must be combined with specific boundary techniques, such as perfectly matched layers and non-reflective boundary conditions, to accurately simulate the radiation of wavefields at the artificial boundaries of truncated computational domains. Padé-type high-order absorbing boundary conditions (HABCs) can provide an arbitrary high accuracy [2], but they are generally limited to regions with smooth boundaries. We propose a comprehensive strategy for cuboidal domains, with treatments for the edges and the corners.

Let the field  $u(\mathbf{x})$  governed by the Helmholtz equation  $\Delta u + k^2 u = 0$  on the cube  $\Omega = [-L, L]^3$ . On the faces of  $\Omega$ , we consider the HABC obtained by approximating the square root in the exact non-reflective boundary operator thanks to the  $(2N + 1)^{\text{th}}$ -order Padé expansion with a  $\theta$ -rotation of the branch cut [2]. On the face belonging to the plane  $x = L$ , the HABC can then be written as

$$\partial_x u = ike^{i\theta/2} \left( u + \frac{2}{M} \sum_{n=1}^N c_n (u + u_n) \right), \quad \text{with } c_n = \tan(n\pi/M) \text{ and } M = 2N + 1. \quad (1)$$

This condition involves  $N$  auxiliary fields  $u_n$  defined only on the face and governed by

$$k^2 (e^{i\theta} c_n + 1) u_n + k^2 e^{i\theta} (c_n + 1) u + [\partial_{yy} + \partial_{zz}] u_n = 0, \quad n = 1 \dots N. \quad (2)$$

Because of the spatial partial derivatives in Eq. 2, boundary conditions must be prescribed on the boundary of the face (*i.e.* on the edges of the cube) for each auxiliary field  $u_n$ .

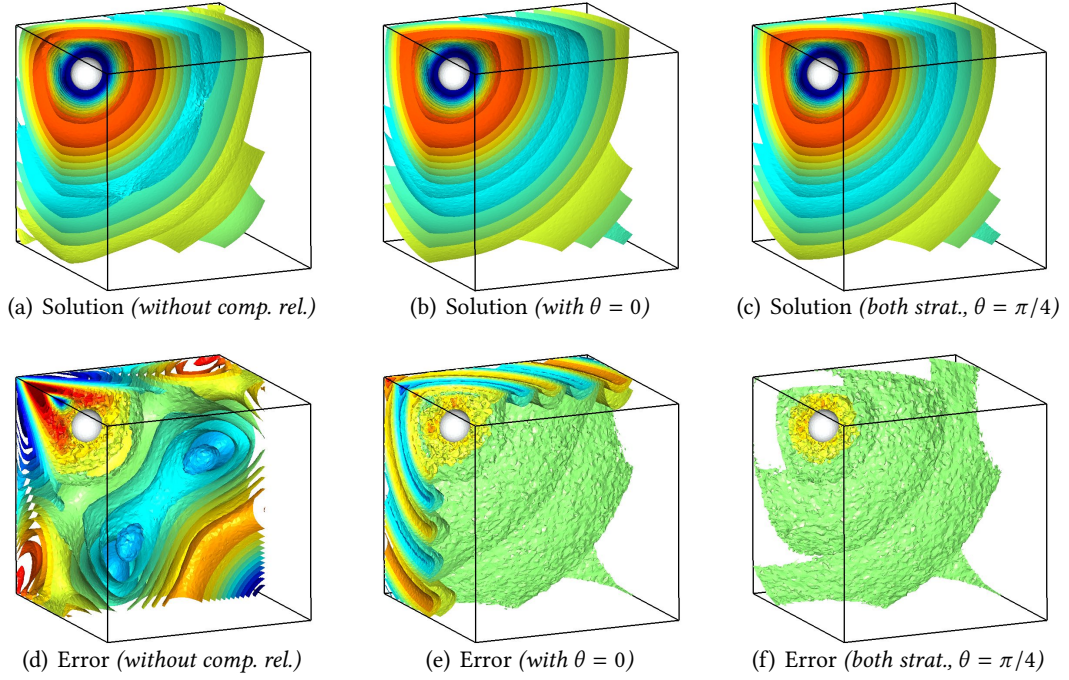


Figure 1: Solutions and errors for the benchmark with HABCs ( $N = 4$ ). Three cases are shown: without compatibility relations (*left*), without rotating branch cut (*middle*), with both strategies (*right*). Isosurfaces of the solutions (scale:  $[-0.2, 0.2]$ ) and the errors (scale:  $[-0.015, 0.015]$ ) are represented in only half the domain. We use a mesh made of approx.  $10^6$  tetrahedron and P1 elements.

In our strategy, we introduce new relations that close the system and that ensure its compatibility without any supplementary approximation. They are derived by manipulating the equations (Eqs. 1-2) corresponding to the different faces, and by introducing auxiliary fields and auxiliary equations on each edge ( $N^2$  per edge) and each corner ( $N^3$  per corner). The result is a multi-dimensional solver with equations to be solved on the volume, the faces, the edges and the corners of  $\Omega$ . See [1] for a time-dependent version of this solver.

As preliminary 3D finite element results, we present simulations of a spherical wave generated inside a cubic domain (Fig. 1). HABCs are prescribed on all the faces of the domain. By comparing the three cases, we see the positive effect of both the compatibility relations and the rotating branch cut on the quality of the solution. When using both strategies (Fig. 1f), the remaining error corresponds to the classical numerical dispersion caused by the mesh.

## References

- [1] A. MODAVE, A. ATLE, J. CHAN, T. WARBURTON, *A GPU-accelerated nodal discontinuous Galerkin method with high-order absorbing boundary conditions and corner/edge compatibility*, To appear in International Journal for Numerical Methods in Engineering
- [2] R. KECHROUD, X. ANTOINE, A. SOULAÏMANI, *Numerical accuracy of a Padé-type non-reflecting boundary condition for the finite element solution of acoustic scattering problems at high-frequency*, International Journal for Numerical Methods in Engineering 64.10 (2005): 1275-1302.